

Oscillating Monitor OM-80

Streamline Range

The exciting Streamline™ OM-80 is a nominal 80mm waterway Oscillating Monitor, designed to provide optimised hydraulic efficiency and long throw performance when the Streamline Long Throw (LTN) nozzles or (LTC) cannons are fitted. The compact low profile configuration, makes this monitor particularly suitable for installation on towers, aircraft hangars, offshore platforms for helideck protection and other areas where space is limited.

The OM-80 is engineered to the highest standards to withstand severe environmental conditions and provide exceptional operational reliability, long life and extremely low maintenance. Experience has shown a 20+ year life-span is achievable, even under harsh conditions. A sealed for life gearbox is provided with adjustable sweep angle between 45° and 120° in 15° intervals and an oscillating speed control. Sealed low friction joints ensure easy movement even at high operating pressures. A highly efficient pelton wheel water motor uses small quantities of fire main water to provide power for automatic oscillation. The OM-80 will therefore operate automatically, immediately after start up of the fire pump and requires no secondary (electric) power source. A quick release lever allows automatic oscillation to be overridden and re-engaged easily during operation.


This Streamline oscillating monitor offers unique adaptability advantages, as it can be upgraded to suit your future changing needs. The OM-80 can be adapted to a

remote control monitor specification over time if required. The whole Streamline range uses a common waterway platform design so key components can still be utilised to minimise cost as site requirements change. Upgrade kits are available, and most are field-fittable to the existing Streamline waterway by a competent site engineer.

When fitted with the Angus long throw range (LTN) of constant flow jet/spray nozzles the OM-80 is highly effective with water or film forming foams like Tridol AFFF and Petroseal FFFP for fast flame attack on hydrocarbon liquids on helidecks, aircraft hangars, process areas, tanker loading bays or


bunded (diked) areas surrounding bulk storage tanks. Long throw foam cannons (LTC) can also be fitted which guarantee optimised foam quality and throw characteristics with the Angus range of foam concentrates. Maximum performance and throws of up to 68 metres can be achieved depending on nozzle/cannon configuration (see separate nozzle/cannon data sheets).

Sealed low friction joints provide easy elevation and horizontal movement even under high operating pressures. The quick and easy Clamp-Lok™ mechanism ensures the monitor is safely locked in position and can be left to operate unattended.

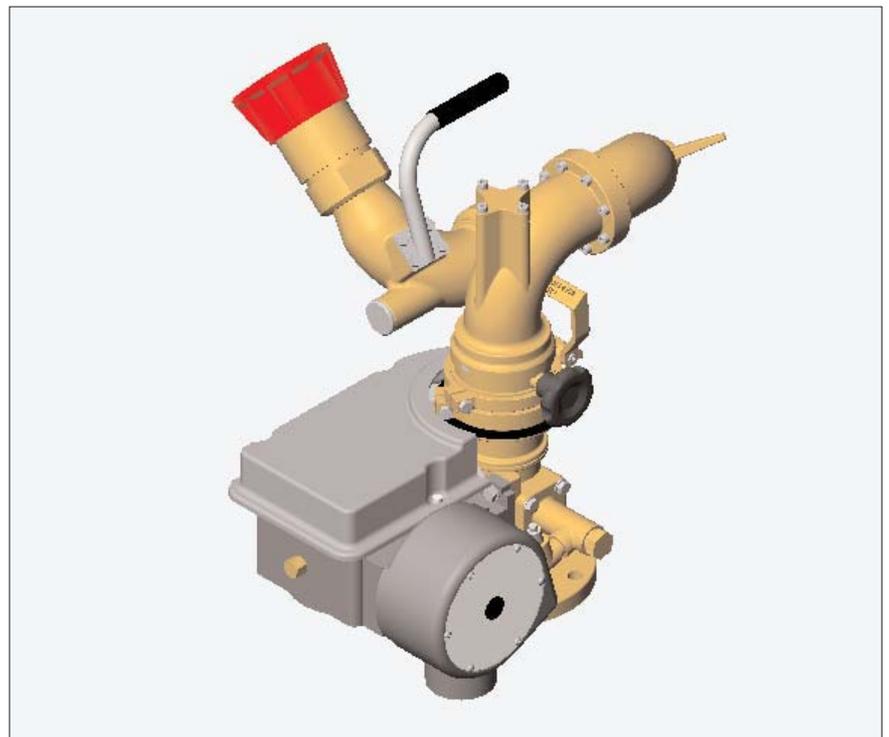

ref: 5371/2/4.05 page: 1 of 2

Two optional test kit are available. The dry test kit avoids passing any liquid onto the risk area to allow for periodic oscillation testing of the monitor. The wet test kit requires a separate temporary water test line to test the pelton wheel.

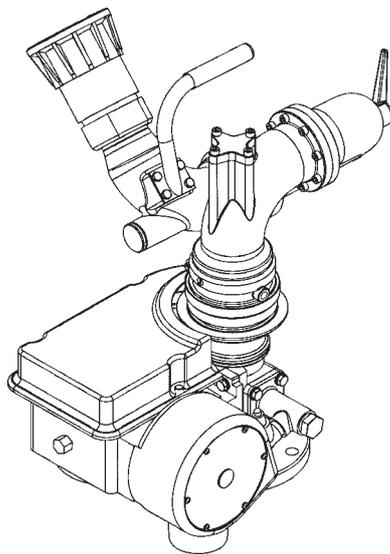

SPECIFICATION

Operating pressure	Max: 16 bar g	Min: 5 bar g (4 bar g to special order)
Test pressure	24 bar g	
Maximum flow	3,600 litres/min	
Inlet flange connections	4" ANSI Class 150 RF (alternatives to special order)	
Outlet connections	2", 2 1/2" BSP Male or flanged to LTC cannons (alternatives to special order)	
Sweep angle	Automatic: 45° to 120° in 15° intervals	Manual: 360° continuous
Nominal elevation*	Max +75° above horizontal (+85° in upright mode)	
Nominal depression*	Max -70° below horizontal. Limited to -5° over gearbox in low profile mode. Limited to -45° or -20° over gearbox in upright mode	
Nominal oscillating frequency	8 cycles/min @ 7 bar g	
Nominal flow rate through water motor	30 litres/min @ 7 bar g	
Approx. weight (without nozzle/cannon)	75 kg	

* Low profile to upright mode adjustable on site (see O&M manual)

MATERIALS

Monitor body	Aluminium Bronze AB2 and Gunmetal LG2 to BS EN 1982	
Gearbox	Cast SG iron to BS2789 with phosphor bronze worm wheels, hardened worm shaft and stainless steel Input/output shaft	
Water motor pelton wheel	Phosphor bronze to BS EN 1982	
Seals	Nitrile synthetic rubber	
Finish	Monitor	Natural (<i>Red to special order</i>)
	Gearbox cover	Phenolic Heat resistant laminate
Grab handle	Stainless steel 316	
Fasteners	Stainless steel A2	
Optional Test kits	Dry test kit: AES 25917	Wet test kit (25mm Storz): AE 25657